



EJ-7R


Wireless pocket receiver

Features

- 16 channels, 4 simultaneously
- High sound quality
- LCD display
- 3,5 mm jack
- Volume control and mute button

EJ-7R is a professional and reliable pocket receiver in a robust aluminium casing. It operates with wireless pocket transmitter EJ-7XT Plus, stationary transmitter EJ-770T and microphone EJ-701TM Plus.

To be used with headphones, earpiece or neck loop.

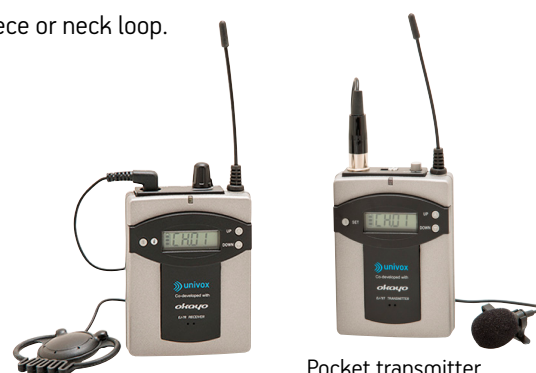

Pocket receiver EJ-7R

Pocket transmitter EJ-7XT Plus
w tie clip mic

Technical data

Technical data – overall system

PLL-receivers and -transmitters with frequencies 863-865MHz

16 channels

Coverage up to 100m

Casing aluminium

LCD indication channel, frequency, battery

Channel adjustment frequency set, up/down

Power requirements 2 x 1,2V NiMH (2100mAh) or
2 x 1,5V alkaline batteries

Size 88x64x26mm

Weight 170g incl. batteries



Headphone GTA-HP1



Earpiece EM-101



Univox neck loop NL-100

Technical data – receiver EJ-7R (part no 501007)

Band width max 12MHz

Dynamic range >110dB

T.D.H. <1%

Equalizer <50µS

RF Spurious rejection 58dB @ 250kHz

AUX out -5dBv/-10dBv/-15dBv/@1 kHz MOD
20KHz High/Mid/Low

Level out Max 750 mV Up

Earphone connector 3,5mm, stereo/mono

Battery life 12h Ni-MH/ 15h Alkaline

For complete manual, please refer to univox.eu.

